


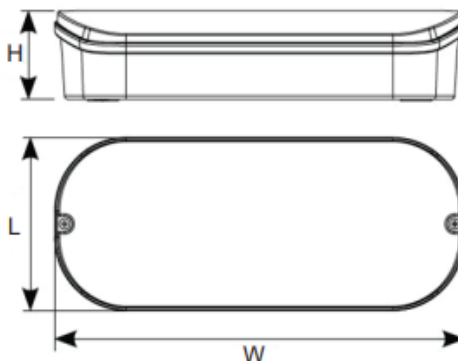

### Overview

High-performance LED Bulkhead Light (Oval). Available in 20W, designed for both indoor and outdoor use. It offers durable construction and excellent resistance to harsh environmental conditions. Suitable for general lighting in corridors, building entrances, parking areas, and industrial facilities. Available color temperatures: 3000K (Warm Light), 6500K (Day Light) and 3CCT (3000K, 4000K, 6500K). Mounting: Surface mounted – wall or ceiling. Ingress Protection: IP65 – dust and water resistant. Available in two distinctive frame colors: white and black.

### Electrical Specifications

|           |           |
|-----------|-----------|
| Model No. | BH-20W    |
| Power     | 20W       |
| Frequency | 50/60 Hz  |
| Voltage   | 170-240 V |

### Light Specifications

|                                          |                          |
|------------------------------------------|--------------------------|
| Luminous Flux                            | 1,900LM                  |
| Luminous Efficacy (rated)                | 95LM/W                   |
| Correlated Color Temperature (CCT)       | 3CCT (3000K,4000K,6500K) |
| Luminaire Light Beam Spread (Beam Angle) | 120°                     |
| Color Rendering Index (CRI)              | ≥80                      |

### Mechanical Specifications

|                              |               |
|------------------------------|---------------|
| Housing Color                | White         |
| Material                     | ABS+PP        |
| Dimensions (L*W*H)           | 135*265*46 mm |
| Ambient Temperature Range    | -20°C ~ 45°C  |
| Ingress Protection Code (IP) | IP65          |

### Performance Warranty

|          |           |
|----------|-----------|
| Warranty | 1 Year    |
| Lifespan | 25,000Hrs |

### APPLICATIONS

