



FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- Environmentally Friendly.
- Isolated Driver.

APPLICATIONS




LMR-FL-05

SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Material	Lifespan
603102	50 W	85-265V	50/60 Hz	>0.9	6000 lm	120 lm/W	6500 K	>80	120°	ALU+PS	30000 h
603302	50 W	85-265V	50/60 Hz	>0.9	6000 lm	120 lm/W	3000 K	>80	120°	ALU+PS	30000 h
603103	100 W	85-265V	50/60 Hz	>0.9	12000 lm	120 lm/W	6500 K	>80	120°	ALU+PS	30000 h
603303	100 W	85-265V	50/60 Hz	>0.9	12000 lm	120 lm/W	3000 K	>80	120°	ALU+PS	30000 h
603104	150 W	85-265V	50/60 Hz	>0.9	18000 lm	120 lm/W	6500 K	>80	120°	ALU+PS	30000 h
603304	150 W	85-265V	50/60 Hz	>0.9	18000 lm	120 lm/W	3000 K	>80	120°	ALU+PS	30000 h
603105	200 W	85-265V	50/60 Hz	>0.9	24000 lm	120 lm/W	6500 K	>80	120°	ALU+PS	30000 h
603305	200 W	85-265V	50/60 Hz	>0.9	24000 lm	120 lm/W	3000 K	>80	120°	ALU+PS	30000 h

DIMENSIONS

ITEM NO.	Rated Power	Length	Width	Height
603102	50 W	238 mm	228 mm	46 mm
603302	50 W	238 mm	228 mm	46 mm
603103	100 W	290 mm	280 mm	59 mm
603303	100 W	290 mm	280 mm	59 mm
603104	150 W	330 mm	320 mm	65 mm
603304	150 W	330 mm	320 mm	65 mm
603105	200 W	360 mm	350 mm	65 mm
603305	200 W	360 mm	350 mm	65 mm

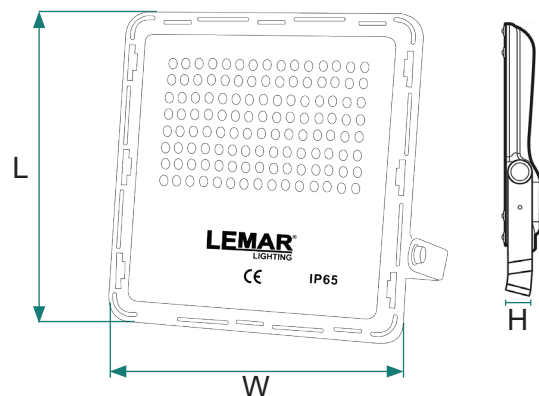

Working Temperature	-20°C ~ 50°C
Housing Colour	White
IP Grade	IP65

Made in China

