

## FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- External and Isolated Driver.
- Environmentally Friendly.



## APPLICATIONS




## LMR-PL-02/ RECESSED MOUNT

### SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Material	Lifespan
303103	18 W	85-260 V	50/60 Hz	>0.6	1440 lm	80 lm/W	6500 K	>70	120°	ALU+PS+PS	30000 h
303203	18 W	85-260 V	50/60 Hz	>0.6	1440 lm	80 lm/W	4000 K	>70	120°	ALU+PS+PS	30000 h
303303	18 W	85-260 V	50/60 Hz	>0.6	1440 lm	80 lm/W	3000 K	>70	120°	ALU+PS+PS	30000 h
303104	20 W	85-260 V	50/60 Hz	>0.6	2000LM	100 lm/W	6500 K	>70	120°	ALU+PS+PS	30000 h

### DIMENSIONS

ITEM NO.	Rated Power	Diameter	Cut size
303103	18 W	225 mm	200 mm
303203	18 W	225 mm	200 mm
303303	18 W	225 mm	200 mm
303104	20 W	225 mm	200 mm

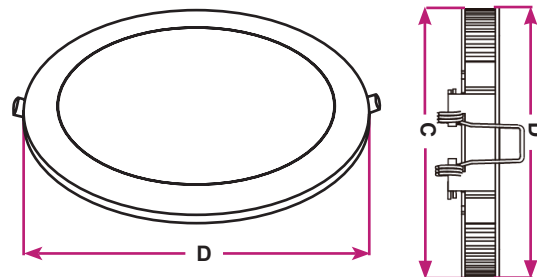

°C	Working Temperature	-20°C ~ 50°C
Color palette icon	Housing Colour	White
Water droplets icon	IP Grade	IP20

Made in China

