



FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- External and Isolated Driver.
- Environmentally Friendly.

APPLICATIONS




LMR-RPL/ RECESSED MOUNT

SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Material	Lifespan
303101	3 W	85-260 V	50/60 Hz	>0.6	195 lm	65 lm/W	6500 K	>70	120°	ALU+PS+PS	30000 h
303201	3 W	85-260 V	50/60 Hz	>0.6	195 lm	65 lm/W	4000 K	>70	120°	ALU+PS+PS	30000 h
303301	3 W	85-260 V	50/60 Hz	>0.6	195 lm	65 lm/W	3000 K	>70	120°	ALU+PS+PS	30000 h
303102	6 W	85-260 V	50/60 Hz	>0.6	420 lm	70 lm/W	6500 K	>70	120°	ALU+PS+PS	30000 h
303202	6 W	85-260 V	50/60 Hz	>0.6	420 lm	70 lm/W	4000 K	>70	120°	ALU+PS+PS	30000 h
302302	6 W	85-260 V	50/60 Hz	>0.6	420 lm	70 lm/W	3000 K	>70	120°	ALU+PS+PS	30000 h

DIMENSIONS

ITEM NO.	Rated Power	Diameter	Cut size
303101	3 W	85 mm	70 mm
303201	3 W	85 mm	70 mm
303301	3 W	85 mm	70 mm
303102	6 W	120 mm	105 mm
303202	6 W	120 mm	105 mm
302302	6 W	120 mm	105 mm

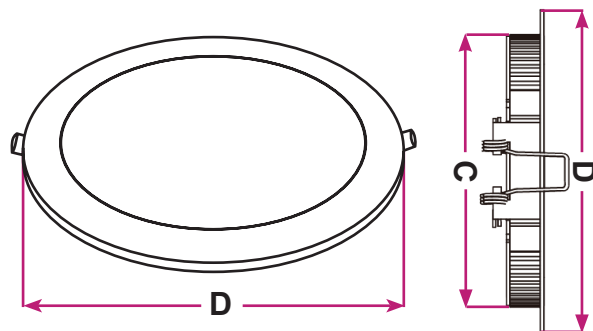

°C	Working Temperature	-20°C ~ 50°C
	Housing Colour	White
	IP Grade	IP20

Made in China

