



### FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- External and Isolated Driver.
- Environmentally Friendly.

### APPLICATIONS




## LMR-S6060PL-48W / SURFACE MOUNTED

### SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Material	Lifespan
308105	48W	85-260 V	50/60 Hz	>0.9	4800 lm	100 lm/W	6000 K	>80	180°	ALU+PS	30000 h
308304	48W	85-260 V	50/60 Hz	>0.9	4800 lm	100 lm/W	3000 K	>80	180°	ALU+PS	30000 h

### DIMENSIONS

ITEM NO.	Rated Power	Length	Width	Height
308105	48 W	600 mm	600 mm	39 mm
308304	48 W	600 mm	600 mm	39 mm

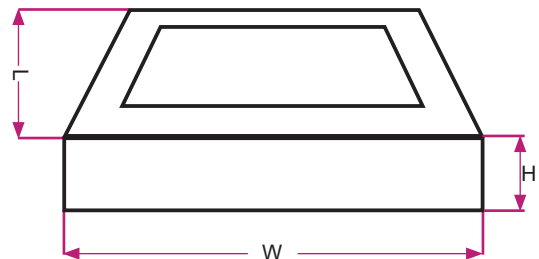

	Working Temperature	-20°C ~ 50°C
	Housing Colour	White
	IP Grade	IP20

Made in China

