



FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- Environmentally Friendly.

APPLICATIONS




LMR-SL-04

SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Chip Brand	Chip Size	Lifespan
36040001	50 W	185-265V	50/60 Hz	>0.9	5500 lm	110 lm/W	6500K	>80	90°*130°	PHILIPS	SMD2835	50000 h
36040002	100 W	185-265V	50/60 Hz	>0.9	11000 lm	110 lm/W	6500K	>80	90°*130°	PHILIPS	SMD2835	50000 h

DIMENSIONS

ITEM NO.	Rated Power	Length	Width	Height
36040001	50 W	486.5mm	151.2mm	88mm
36040002	100 W	564mm	189.1mm	88mm

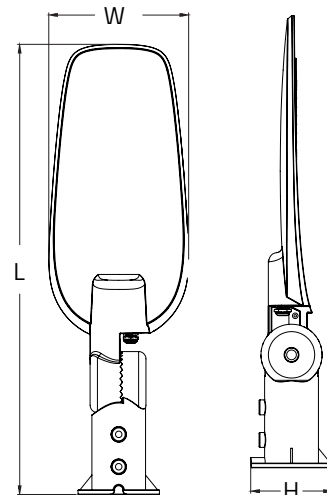

	Working Temperature	-20°C ~ 50°C
	Housing Colour	GRAY
	IP Grade	IP66
	IK Grade	IK07
	Material	ALU

Made in China

