



### FEATURES & BENEFITS

- Solar energy only.
- Multiple installation methods.
- Bracket 360° adjustable, light panel 135° adjustable.
- Sensors inductive, wider detection angle, higher sensitivity.
- High performance lithium battery.
- Long lifespan.
- Environmentally friendly.

### APPLICATIONS




### LMR-SOLAR-FL03-5W

#### SPECIFICATIONS

ITEM NO.	Rated Power	Luminous Flux	Battery	Solar Panel	Charging Time	Working Time	CCT	Sensor	Beam Angle
803201	5W	500 lm	Li-ion, 3000mAh/3.7V	Mono-crystalline silicon (2.3Wp)	6Hrs/Day	2 different working modes	4000K	Detection angle: 120° Detection area: ≤6M	90°

#### DIMENSIONS

ITEM NO.	Rated Power	Length	Width	Height
803201	5W	217.4mm	149.3mm	33.7mm

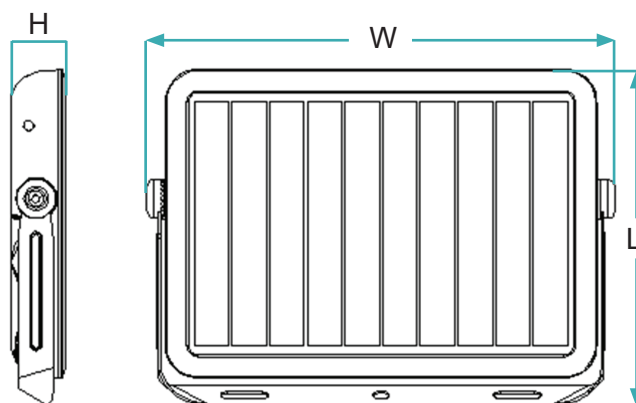

°C	Working Temperature	-15°C - 50°C
IP65	IP Grade	IP65
ABS+PC	Material	ABS+PC
BLACK	Housing Colour	BLACK
SMD 2835*30pcs	Chip Size	SMD 2835*30pcs

Made in China



## TWO WORKING MODES:




please press the button to adjust to the demanded working mode.



### Mode A:

When battery capacity above >30%, Automatically turns on to full brightness.

When motion is detected in the range  $\leq 6$ mtrs, then dim to weak brightness in 20 seconds of no motion.

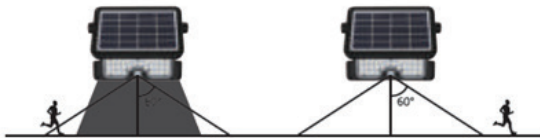

When battery capacity below <30%, Automatically turns on to full brightness.

When motion is detected in the range  $\leq 6$ mtrs, then turns off in 20 seconds of no motion.



### Mode B:

Press the button for 3 seconds and shining one time, lamp turns to constant lighting mode, both motion and light sensors disabled. Permanently keep lighting until the battery capacity reduces to zero switching back to Sensor Mode.


## INSTALLATION:



A: Wall mounted



B: Put on flat surface directly



C: Hanging on the wall

