



### FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- External and Isolated Driver.
- Environmentally Friendly.
- Flexible Cut Size.

### APPLICATIONS




### LMR-SS3D / RECESSED MOUNT

### SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Material	Lifespan
307109	10 W	85-265 V	50/60 Hz	>0.5	1100 lm	110 lm/W	7000 K	>80	180°	ALU+PC	30000 h
307309	10 W	85-265 V	50/60 Hz	>0.5	1100 lm	110 lm/W	3000 K	>80	180°	ALU+PC	30000 h
307110	15 W	85-265 V	50/60 Hz	>0.5	1650 lm	110 lm/W	7000 K	>80	180°	ALU+PC	30000 h
307310	15 W	85-265 V	50/60 Hz	>0.5	1650 lm	110 lm/W	3000 K	>80	180°	ALU+PC	30000 h
307111	22 W	85-265 V	50/60 Hz	>0.5	2860 lm	130 lm/W	7000 K	>80	180°	ALU+PC	30000 h
307311	22 W	85-265 V	50/60 Hz	>0.5	2860 lm	130 lm/W	3000 K	>80	180°	ALU+PC	30000 h
307112	32 W	85-265 V	50/60 Hz	>0.5	4160 lm	130 lm/W	7000 K	>80	180°	ALU+PC	30000 h
307312	32 W	85-265 V	50/60 Hz	>0.5	4160 lm	130 lm/W	3000 K	>80	180°	ALU+PC	30000 h

### DIMENSIONS

ITEM NO.	Rated Power	Width	Length	Cut size
307109	10 W	100 mm	100 mm	55-80 mm
307309	10 W	100 mm	100 mm	55-80 mm
307110	15 W	120 mm	120 mm	55-100 mm
307310	15 W	120 mm	120 mm	55-100 mm
307111	22 W	170 mm	170 mm	55-150 mm
307311	22 W	170 mm	170 mm	55-150 mm
307112	32 W	220 mm	220 mm	55-200 mm
307312	32 W	220 mm	220 mm	55-200 mm

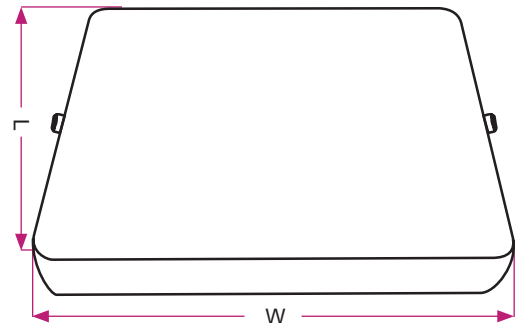

°C	Working Temperature	-20°C ~ 50°C
	Housing Colour	White
	IP Grade	IP20
	UGR	<19

Made in China

