



FEATURES & BENEFITS

- High Energy Efficiency.
- High Brightness.
- Low Power Consumption.
- Long lifespan.
- Easy Installation and Maintenance.
- External and Isolated Driver.
- Environmentally Friendly.

APPLICATIONS




LMR-6060B / RECESSED MOUNT

SPECIFICATIONS

ITEM NO.	Rated Power	Input Voltage	Frequency	Power Factor	Luminous Flux	Luminous Efficacy	CCT	CRI	Beam Angle	Material	Lifespan
308111	40W	100-300 V	50/60 Hz	>0.9	4000 lm	100 lm/W	6500 K	>80	120°	ALU+Iron+PS	50000 h

DIMENSIONS

ITEM NO.	Rated Power	Length	Width	Height
308111	40W	595 mm	595 mm	24 mm

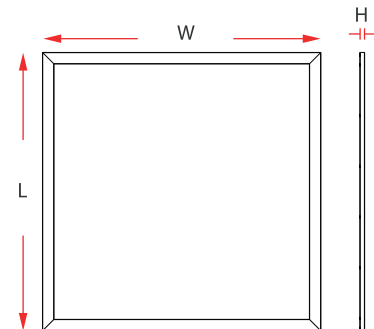

Working Temperature	-20°C ~ 50°C
Housing Colour	White
IP Grade	IP20

Made in China

