


Provided by
Bridgelux

FEATURES & BENEFITS

- Solar energy only.
- High luminous efficacy of 60 lm/Watt.
- High performance LiFePO4 battery.
- Battery changeable.
- High quality mono-crystalline silicon solar panel.
- Osram Chip Brand.
- Long lifespan.
- Environmentally friendly.

APPLICATIONS



LMR-SLRFL8-250W


ITEM NO.	Model No.	Real power	Total Lumen	CRI	CCT	Battery	Solar Panel
803107	LMR-SLRFL8-250W	15W	1800 lm	>80	7000K	LiFePO4/35Ah	polycrystalline Solar panel 28W
803307	LMR-SLRFL8-250W	15W	1800 lm	>80	3000K	LiFePO4/35Ah	polycrystalline Solar panel 28W

	Working Temperature	-20°C - 50°C
	Charging Hours	6~8h
	Lighting Hours	12-15h
	Installation Height	8-10m
	Lifespan	50,000h

	IP Grade	IP65
	IK Grade	IK07
	Material	Aluminum
	Housing Colour	White
	Beam Angle	120°

DIMENSIONS

Model No.	Lamp L*W*H	Solar Panel L*W*H
LMR-SLRFL8-250W	335.5*316*50.5mm	600*350*305mm
LMR-SLRFL8-250W	335.5*316*50.5mm	600*350*305mm

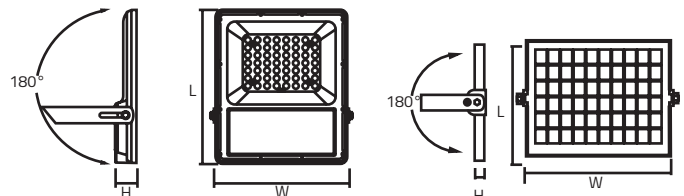

Made in China

